

## QT2

### The most powerful 3-phase Quad microinverter

- Designed for 3-phase grid connection (208V, 480V)
- Single unit connects to 4 modules, 2 MPPTs, module-level DC voltage
- Maximum continuous AC output power 1728VA @ 208V, 1800VA @ 480V
- Engineered to harness today's high-capacity PV modules (Maximum input current 20A)
- Integrated safety protection relay
- Adjustable power factor
- Balancing 3-phase output
- Compatible with both  $\Delta$  and Y 3-phase grid


## PRODUCT FEATURES

**APsystems introduces its 2nd generation of native 3-phase quad microinverters, reaching unprecedented power outputs of 1728VA (for QT2-208) and 1800VA (for QT2-480) to harness the power of today's high-output PV modules. The QT2 microinverter gives commercial installers a powerful plug-and-play MLPE inverter that installs faster than competing solutions and is inherently compliant to rapid shutdown requirements.**

With balancing 3-phase output, 4 DC inputs and encrypted ZigBee wireless, installers and system owners alike benefit from new QT2 architecture platform. The innovative design facilitates thermal dissipation while maximizing power production. The components are encapsulated with silicone to reduce stress on the electronics, dissipate heat, enhance waterproof properties, and ensure maximum reliability of the system. 24/7 access to performance data through apps or APsystems EMA web-based portal facilitate remote diagnosis and troubleshooting.

The new QT2 is grid interactive through its Reactive Power Control (RPC) feature, designed to better manage photovoltaic power spikes in the grid. With an excellent performance and high conversion efficiency, a unique integration with less components, the QT2 is a game changer for commercial solar.

## WIRING SCHEMATIC

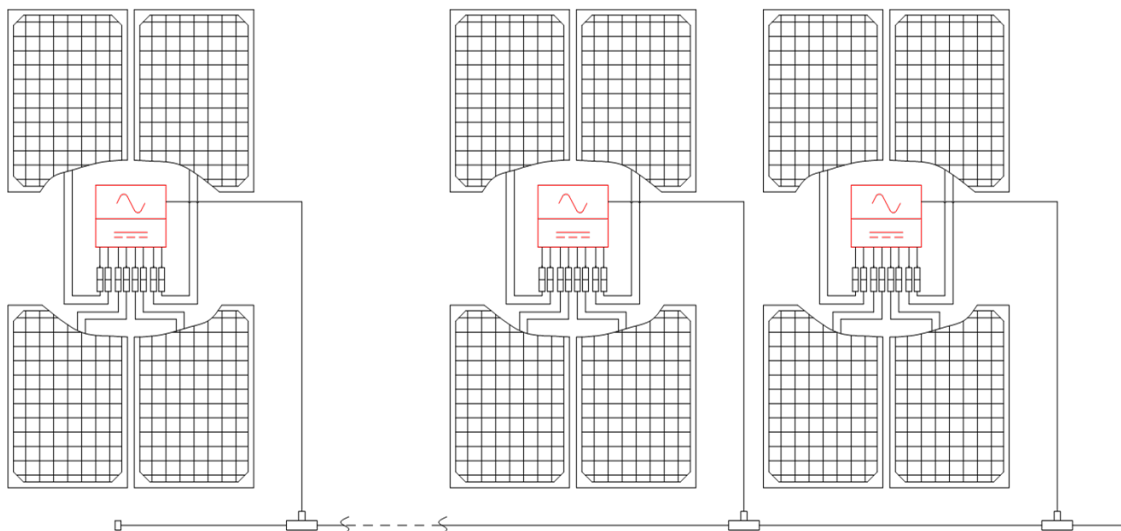

# Datasheet | QT2 3-Phase Microinverter

## Model

QT2-208

QT2-480

## Region

Philippines etc.

## Input Data (DC)

Recommended PV Module Power (STC) Range	315Wp-670Wp+	
Peak Power Tracking Voltage	30V-45V	
Operating Voltage Range	26V-60V	
Maximum Input Voltage	60V	
Maximum Input Current	20A x 4	
Maximum input short circuit current	25A per input	

## Output Data (AC)

Maximum Continuous Output Power	1728VA	1800VA
Nominal Output Voltage/Range <sup>(1)</sup>	208V/183V-229V	480V/422V-528V
Nominal Output Current	4.8Ax3	2.17Ax3
Nominal Output Frequency/Range <sup>(1)</sup>	60Hz/59.3-60.5Hz	
Power Factor(Default/Adjustable)	0.99/0.8 leading...0.8 lagging	
Maximum Units per 10AWG branch <sup>(2)</sup>	7	16
AC Bus Cable	10AWG (35A)	

## Efficiency

Peak Efficiency	96.5%
Nominal MPPT Efficiency	99.5%
Night Power Consumption	40mW

## Mechanical Data

Operating Ambient Temperature Range <sup>(3)</sup>	-40 °F to +149 °F (-40 °C to +65 °C )
Storage Temperature Range	-40 °F to +185 °F (-40 °C to +85 °C )
Dimensions (W x H x D)	14" x 9.5" x 1.8" (359mm X 242mm X 46mm)
Weight	13 lbs (6kg)
DC Connector Type	Stäubli MC4 PV-ADBP4-S2&ADSP4-S2
Cooling	Natural Convection - No Fans
Enclosure Environmental Rating	Type 6

## Features

Communication (Inverter To ECU) <sup>(4)</sup>	Encrypted ZigBee
Isolation Design	High Frequency Transformers, Galvanically Isolated
Energy Management	Energy Management Analysis (EMA) system
Warranty <sup>(5)</sup>	10 Years Standard ; Extended Warranty Optional

## Compliances

Safety & Grid Compliances	UL1741; CA Rule 21 (UL 1741 SA); UL 1741SB; IEEE1547;
---------------------------	--

(1) Nominal voltage/frequency range can be extended beyond nominal if required by the utility.

(2) Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

(3) The inverter may enter to power de-grade mode under poor ventilation and heat dissipation installation environment.

(4) Recommend no more than 80 inverters register to one ECU for stable communication.

(5) To be eligible for the warranty, APsystems microinverters need to be monitored via the EMA portal. Please refer to our warranty T&Cs available on [global.APsystems.com](http://global.APsystems.com).

© All Rights Reserved

Specifications subject to change without notice please ensure you are using the most recent update found at [global.APsystems.com](http://global.APsystems.com)

## APsystems Shanghai:

Rm.B305 No.188, Zhangyang Road, Pudong, Shanghai  
200120,P.R.C

EMAIL: [info.apac@APsystems.com](mailto:info.apac@APsystems.com)