



Safe and **Smart** Energy Management System



AP DC Combiner

- ▶ Ingress protection IP65
- Max Continuous current 250A
- ▶ Can be connected to 4 batteries at most
- ▶ Increase the capacity of APstorage
- ► Extend the working hours of APstorage
- ► Simple installation and efficient distribution of electrical power across various circuits

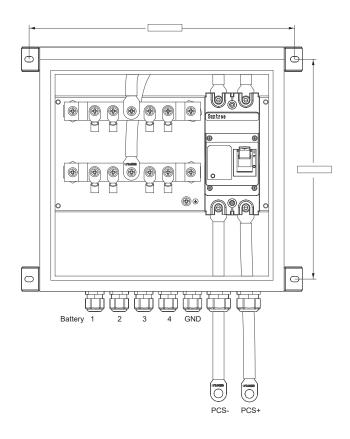



Datasheet | AP DC Combiner

General Specifications

Dimensions W/H/D	444mm x 433mm x 225mm
Weight	14.6kg
Operating Ambient Temperature	-25°C ~ +65°C
Storage Temperature Range	-40°C ~ +85°C
Environment category	Outdoor
Relative Humidity	10%-90%
Ingress Protection	IP65
Ventilation	Natural convection
Permissible Altitude	≤2000m
Warranty	5 years
DC Input/Output Data	
Nominal DC voltage	51.2VDC
DC operating voltage range	40-60VDC
Max Continuous current	250A
DC cables length	1500mm

© All Rights Reserved

Specifications subject to change without notice please ensure you are using the most recent update found at web : $\underline{\mathsf{APsystems.com}}$

Building 2, No. 522, Yatai Road, Jiaxing, 314000

Tel: 400-100-8470

Mail: Info.global@APsystems.com